




Smart Series Temperature-Check Tablets ***1 second scan from 3ft with +/- 0.5°C accuracy***

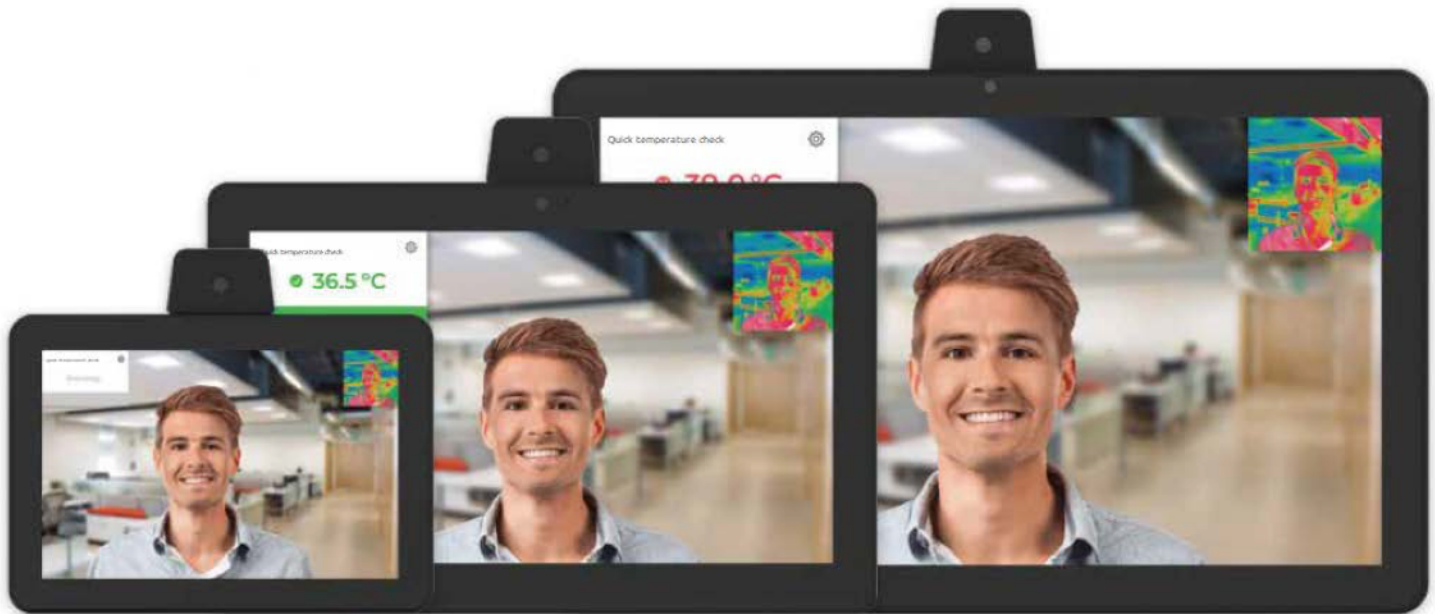


Smart-10
10.1" panel

Smart-15
15.6" panel

Smart-21
21.5" panel

Add an extra layer of protection to your facility and help protect your most valuable assets - your employees and residents.

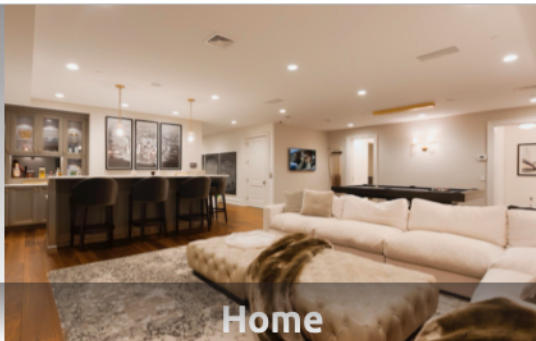



Increase safety with a quick temperature check

To ensure that individuals entering a location are not running a high temperature, Current Home introduces the new infrared temperature sensor/detector. It provides alerts when a person is running a high temperature within 1 second.

The system uses an advanced algorithm for detecting and calculating heat signatures. Based on technology developed in Germany, the highly accurate sensor measures with a tolerance of +/- 0.5 degrees Celsius (+/- 0.9 degrees Fahrenheit). Smart tablets also come with a 2-year warranty.

Why a temperature sensor?

- Provides the first layer of screening protection
- More hygienic with non-touch infrared technology
- Multiple devices can be monitored by a single user
- Camera reversible 180°

Options:

- Adjustable pole stand with weighted base
- Smart wall mount
- Smart-1/Smart-2 desktop stands
- Future firmware upgrade options
 - Photo & thermal result email alerts
 - Facial recognition
 - Customized flagging
 - Integration with third-party control and access systems



Smart panel shown with optional pole stand




Smart wall mount




Smart-1 desktop mount



Smart-2 desktop mount

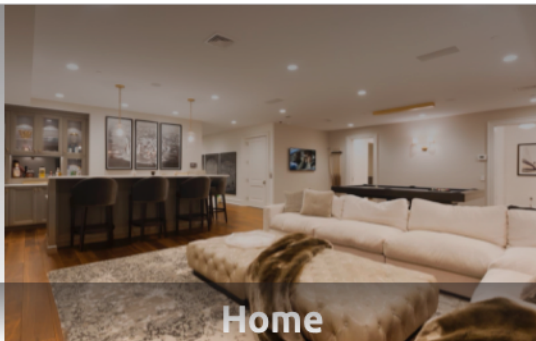

Home

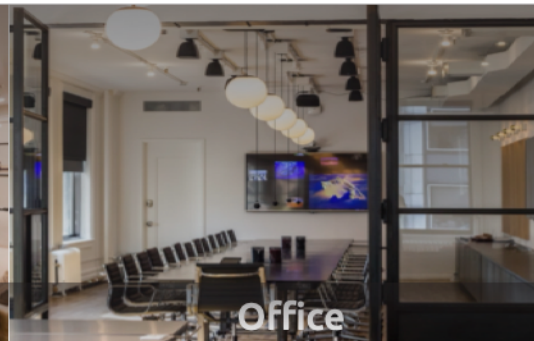

Office



Full specifications:

		Smart-10	Smart-15	Smart-21	
Screen Size		10"	15.6"	21.5"	
Panel Information	Resolution	1280 x 800	1920 X 1080		
	Brightness	350 cd/m ²	250 cd/m ²		
	Contrast ratio	800:1	1000:1		
	Aspect Ratio	16:10	16:9		
	Active Display Area	134.8 x 216.2mm	344.16 x 193.59 mm	476.06 x 267.786 mm	
	Viewing angle	H:170° / V:170°	H:178° / V:178°		
	Touch Tech.	5 point cap touch (6H semi-tempered glass)	10 point cap touch (reflective glass)		
Hardware & OS	CPU	RK3288 Cortex A17, Quad core 1.8GHz			
	RAM	2GB DDR3			
	ROM	8GB eMMC Flash			
	OS	Android 7.1			
Video/Image	Video format	H.265, VP8, RV, WMV, AVS, H.263, MPEG4, HTML5, Flash 10	H.265, VP8, RV, WMV, AVS, H.263, MPEG4, Up to 4K2K decoding, HTML5, Flash 10		
	Audio format	MP3/ WMA / AAC etc.			
	Image format	JPEG, BMP, PNG			
Audio	Speaker	1W x 2	2W x 2		
Communication	Bluetooth	EDR 4.0			
	WiFi	802.11 b/g/n 2.4GHz and 5GHz			
	Ethernet	10/100 LAN			
General Information	Color	Black			
	I/O	RJ45 x 1; USB x 1; SD slot x 1; Micro-USB x 1; 3.5mm audio x 1; Recover x 1; expandable 2 USB	RJ45 x 1; USB x 4; SD slot x 1; Micro-USB x 1; 3.5mm audio x 1; Recover x 1; GPIO Support	RJ45 x 1; USB x 4; SD slot x 1; Micro-USB x 1; 3.5mm audio x 1; Recover x 1; RS232 x 2; GPIO Support	
	AV Capability	Front Facing Camera 2 MP fixed focus			
	Included in Box	Tablet, Power Adapter, Power cable			
	Sensors	G-sensor			
	Consumption	11W	15W	32W	
	Power Input	12V 2A or PoE (802.3at)	12V 5A		
	Operating Environment	Operating: 32°F to 100°F (0°C to 40°C); Storage: -4° F to 122°F (-20°C to 50°C) Operating: 20%-80%; Storage: 10%-95%			
	Certification	CE, FCC, ROHS			
	Language	Multi language			
	VESA	VESA 75	VESA 100		
	Warranty	2 Years			
	Infrared temperature Sensor	Power Input	3.3- 3.6V, 50mA, USB connect		
Size		65.2mm x 38.5mm x 22mm			
Temperature check distance		0.3m-1m			
Temperature check range		30°C to 45°C			
Temperature check error		+/-0.5°C@1 Hz			
Dimension	Size (WxDxH)	267 x 34 x 165 mm	383.8 x 223.2 x 30.1 mm	534.5 x 326 x 47.6326 mm	
	Product Weight	700g	1.4Kg	3.8Kg	
	Box Size	385 x 65 x 222 mm	444 x 348 x 112 mm	582 x 422 x 114 mm	



Q&A:

Q: How accurate is the infrared sensor?

A: +/- 0.5 degree Celsius.

Q: What is the scan distance?

A: 0.5 to 1 meter.

Q: What is the temperature detection speed?

A: 1 second.

Q: How many people can it detect one time?

A: 1 person can be scanned at a time.

Q: Is there an option to store the data of people checked? If yes, how far back?

A: Currently no. This will be a future option.

Q: Is the unit able to detect people of different heights (e.g. children, adults 3' to 6.5')?

A: There's a visible sensor and a camera that will show your face on the LCD screen. Within the effective scanning range, the sensor should pick up the face, though in extreme cases the tablet might need to be adjusted.

Q: Are there any data/tests available regarding the accuracy of this unit?

A: The accuracy is at 0.5 degree Celsius which is provided by our component manufacturer located in Germany. For the past few months this module has been implemented with projects for access control.

Q: Can the sensor be affixed to a door, away from the tablet that collects data?

A: The sensor must be connected to the tablet at this time.

Q: How does the alert message work? Are there display and sound alerts?

A: On the display screen, it will show the person's face and current temperature. If it senses a temperature higher than what has been set as normal, the tablet will show red and emit an alert sound.

Q: Will the system detect objects and/or animals?

A: The system is designed to only detect people.

